

LOAD & HAND CHAIN

Load chain is manufactured from alloy steel to meet Grade 8 properties. The chain is calibrated to a fine tolerance and is used on manually operated chain hoists. To ensure safety during lifting and operating of a chain block, the chain is proof tested to 2.5 times its working load limit.



McKinnon Chain






COMMODITY	DESCRIPTION	DIAMETER	PITCH (P)	WLL	APPROX MASS KG/M	GRADE MARKINGS
		(DN) NOM	NOM	TONNE		
CAL071T	7.1 MM GRADE T LOAD CHAIN	7.10	21.21	1.60	1.10	T71
CAL080T	8.0 MM GRADE T LOAD CHAIN	8.00	24.12	2.00	1.39	T80
CAL090T	9.0 MM GRADE T LOAD CHAIN	9.00	27.13	2.50	1.76	T90
CAL100T	10.0 MM GRADE T LOAD CHAIN	10.00	30.30	3.20	2.18	T100

MANUFACTURE TO ISO/SANS 16877, 16872 & EN818-7.

HAND CHAIN

McKinnon Chain offers a variety of hand chains for chain blocks and roller shutter doors. These chains are calibrated to a fine tolerance and are available in selfcolour and zinc electroplated finish.

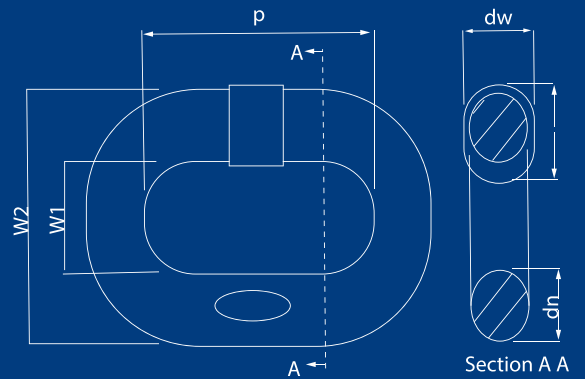

COMMODITY	DESCRIPTION	PITCH (P)	PITCH OVER 11 LINKS	W1	WLL	APPROX MASS KG/M
		NOM	MIN	MIN	TONNE	
CHC050TOCO	5.0MM TOCO HAND CHAIN	22.00	241.42	7.00	0.24	0.43
CHC056TOCO	5.6MM TOCO HAND CHAIN	23.70	259.53	7.50	0.30	0.55
CHC056SER	5.6MM SERANDA HAND CHAIN	19.50	291.80	8.70	0.30	0.60
CHC060MKI	6.0MM ROLLER MKI	26.40	290.25	9.00	0.34	0.63
CHC060MKIGRIP	6.0MM ROLLER MKI HAND CHAIN - CALIBRATED	27.00	296.29	9.00	0.34	0.62

*Please contact our office for more sizes.